




META GREENTECII

Datablad

Aquamatic

Aquacell P2-COMPACT

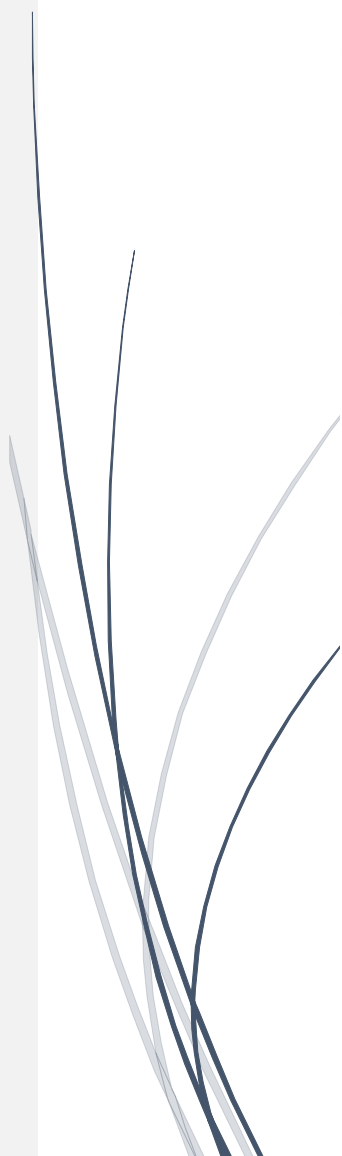



META GREENTECH II

Modell P2-COMPACT

Mobil vakuumpøvetaker

- Superkompakt design
- Tar prøver på puls/tid/hendelse
- Enkel å programmere
- Solid og slitesterk pumpe
- Løftehøyde 7 meter
- Integret 5 l. oppsamlingsbeholder
- Integret oppladbart batteri for opptil 400 prøver.



Mål: 430x320x325mm (HxBxD)

Vekt: 7.3kg

Inntaksslange: 2m

Temperaturområde (omgivelser): -10°C to 50°C



Integret batteri

12V, 7Ah blybatteri med lader.



Aquacell P2-COOLBOX

Prøvetakeren kan også leveres med kjøleboks



Wall Mounted
Aquacell S50



Portable Aquacell
P2-COMPACT



Wall Mounted Aquacell S100
with optional Suspension
Bracket and 10ltr Container



Stationary, Refrigerated
Aquacell S320H



P2-COMPACT



P2-COOLBOX



P2-MULTIFORM



Product Features Key

-  Portable
-  Floor Mounted
-  Indoor & Outdoor
-  Sample Cooling
-  Sample Frost Protection
-  Suitable for Single Containers
-  Suitable for Multiple Bottles
-  Can be used with Pressurised Pipeline Interface

MODEL	P2-COMPACT	P2-COOLBOX	P2-MULTIFORM
GENERAL			
MCERTS Certified	Yes	Yes	Yes
Sample temperature control	No	Passive	No
Sample frost protection	No	Passive	No
Suitable for outdoor use	Yes	Yes	Yes
DIMENSIONS/WEIGHTS			
Size (mm)	H430 W320 D375	H835 W430 D430	H780 W445 D445
Weight excluding container and options (Kg)	7.3	17.5	8.5
ENVIRONMENTAL			
Minimum ambient working temperature °C	-10	-10	-10
Maximum ambient working temperature °C	50	50	50
POWER OPTIONS			
Integral battery 12VDC 7Ah	Opt	Opt	Opt
Mains 110/220/230VAC 50Hz	Opt	Opt	Opt
Float charged backup battery (12VDC 7Ah)	Opt	Opt	Opt
Separate 12VDC	Opt	Opt	Opt
POWER CONSUMPTION			
Current (A) @ 12VDC	5	5	5
Power (VA) @110VAC	60	60	60
Power (VA) @220VAC	60	60	60
Power (VA) @230VAC	60	60	60
SAMPLE COLLECTION VESSELS			
5 litre container	Yes	Yes	No
25 litre container	No	No	Opt
12 x 1 litre PET Bottler	No	No	Opt
12 x 1 litre glass Bottler	No	No	Opt
24 x 1 litre HDPE Bottler	No	No	Opt
OPTIONAL EQUIPMENT			
Ancillary Signal Connection (for flowmeters, pH meters, PLC's etc)	Opt	Opt	Opt
Bottler Connection	N/A	N/A	Opt
Data Download Connection	Opt	Opt	Opt
Sample Temperature Monitoring	Opt	Opt	Opt
Transportation Truck	Opt	Opt	Opt



Aquamatic Ltd
 Soapstone Way, Irlam, Manchester
 M44 6GP, UK
 t: +44 (0) 161 777 6607
 f: +44 (0) 161 777 6617
 sales@aquamaticsamplers.com
 www.aquamaticsamplers.com

