



META GREENTECH II

Datablad

Aquamatic

Aquacell S50 vakuumpåvetaker





Modell S50

Vegghengt vakuumprøvetaker

- Kompakt design
- Tar prøver på puls/tid/hendelse
- Enkel å programmere
- Solid og slitesterk pumpe
- Løftehøyde 7 meter



Mål: 330x300x250mm(HxBxD)

Vekt: 8.0kg

Inntaksslange: 5m

Temperaturområde (omgivelser): -10°C to 50°C



Modell Aquacell S100

Prøvetakeren kan også leveres for utendørs montering (IP55).

Prøvetakeren har låsbart lokk.

Ekstra beskyttelse!

Robust, låsbart, IP65-kapslet skap, for ekstra beskyttelse for Aquacell S50 (tilleggsutstyr).



Wall Mounted
Aquacell S50




Portable Aquacell
P2-COMPACT



Wall Mounted Aquacell S100
with optional Suspension
Bracket and 10ltr Container



Stationary, Refrigerated
Aquacell S320H

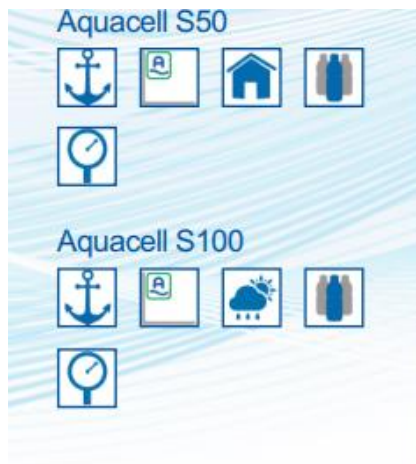

Product Features Key

-  Stationary
-  Wall Mounted
-  Indoor Only
-  Indoor & Outdoor
-  Suitable for Multiple Bottles
-  Can be used with Pressurised Pipeline Interface



Aquamatic Ltd
 Soapstone Way, Irlam, Manchester
 M44 6GP, UK
 +44(0)161 777 6607
 sales@aquamaticsamplers.com
 www.aquamaticsamplers.com

MODEL	S50	S100
GENERAL		
MCERTS compliant	Yes	Yes
Sample temperature control	No	No
Sample frost protection	No	No
Suitable for outdoor use	No	Yes
Intake hose length	5m	10m
DIMENSIONS/WEIGHTS		
Size (mm)	H290 W290 D240	H330 W300 D250
Weight excluding container and options (Kg)	7.5	8.0
POWER OPTIONS		
Integral Battery 12VDC 7Ah	Opt	Opt
Mains 110/220/230VAC 50Hz	Yes	Yes
Float Charged Backup Battery (12VDC 7Ah)	Opt	Opt
Separate 12VDC	Opt	Opt
POWER CONSUMPTION (VA)		
@110VAC (max. inrush current (A) in brackets)	60 (5)	60 (5)
@220VAC (max. inrush current (A) in brackets)	60 (5)	60 (5)
@230VAC (max. inrush current (A) in brackets)	60 (5)	60 (5)
ENVIRONMENTAL		
IP Rating	50	55
Minimum ambient working temperature °C	-10	-10
SAMPLE COLLECTION VESSELS		
2.5, 5 and 10 litre HDPE Bottles	Opt	Opt
25 litre MDPE Bottle	Opt	Opt
2 x 4.5 litre Self-Emptying Polypropylene Bottler	Opt	Opt
4 x 5 litre Glass Bottler	Opt	Opt
4 x 5 litre HDPE Bottler	Opt	Opt
12 x 0.75 litre Glass Bottler	Opt	Opt
12 x 1 litre PET Bottler	Opt	Opt
24 x 1 litre HDPE Bottler	Opt	Opt
OPTIONAL EQUIPMENT		
Ancillary Signal Connection (for flowmeters, pH meters, PLC's etc)	Opt	Opt
Bottler Connection	Opt	Opt
Data Connection	Opt	Opt
Sample Temperature Monitoring	Opt	Opt
Contamination Shield	Opt	Yes
Quick Release Wall Bracket	Opt	Yes
Sample Container Suspension Bracket	Opt	Opt
Pressurised Pipeline Interface	Opt	Opt

Version 1h/07-19